


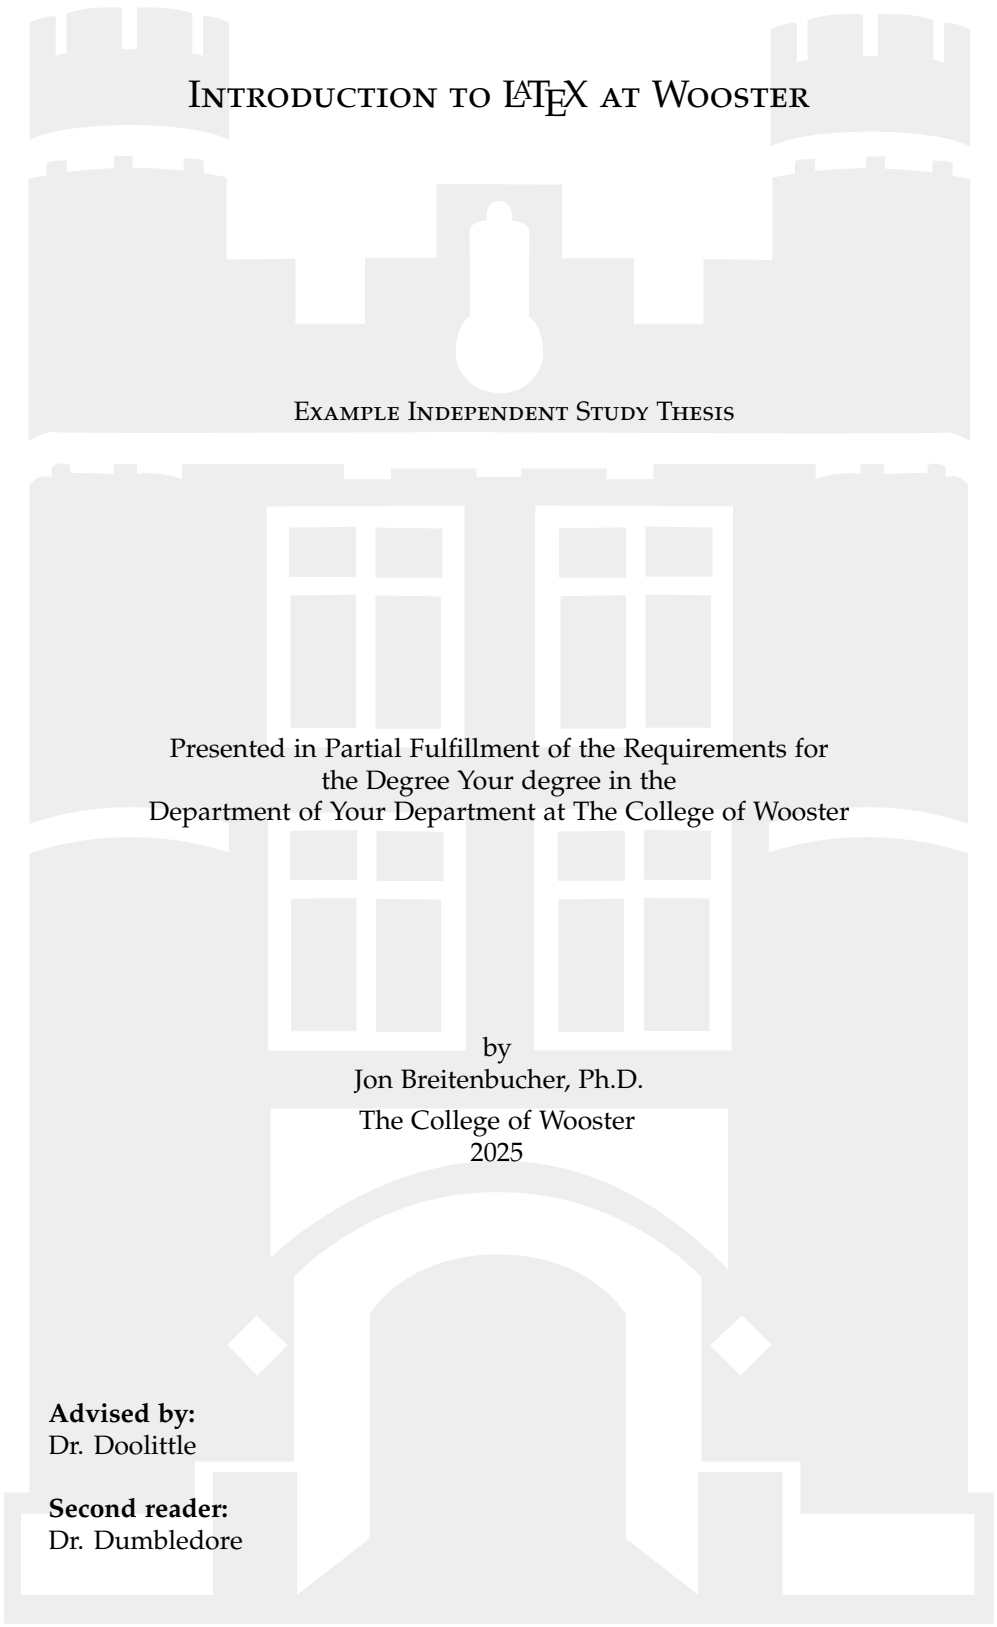

INTRODUCTION TO L^AT_EX AT WOOSTER

EXAMPLE INDEPENDENT STUDY THESIS

Presented in Partial Fulfillment of the Requirements for
the Degree Your degree in the
Department of Your Department at The College of Wooster

by
Jon Breitenbucher, Ph.D.
The College of Wooster
2025

Advised by:
Dr. Doolittle

Second reader:
Dr. Dumbledore

ABSTRACT

Include a short summary of your thesis, including any pertinent results. This section is *not* optional, and the reader should be able to learn the meat of your thesis by reading this (short) section.

This work is dedicated to the future generations of Wooster students.

ACKNOWLEDGMENTS

I would like to acknowledge Prof. Lowell Boone in the Physics Department for his suggestions and code.

VITA

Publications

Fields of Study Major field: Major

Minor field: Minor

Specialization: Area of IS research

CONTENTS

Abstract	iii
Dedication	iv
Acknowledgments	v
Vita	vi
Contents	vii
List of Figures	ix
List of Tables	x
List of Listings	xi
Preface	xii

CHAPTER	PAGE
1 Introduction	1
1.1 What is in <code>main.tex</code> ?	1
2 In the beginning: Knuth said “Let there be $\text{\TeX}$ ”	3
2.1 My new section	3
2.2 Theorems, definitions, examples, oh my!	5
2.3 Putting code in the main body of the thesis	6
3 Working with figures and tables	9
3.1 Getting a simple figure in the document	9
3.1.1 Drawing figures in $\text{\LaTeX}$	10
3.1.2 Minipages	11
3.1.3 Two pictures in one figure	12
3.2 Tables	13
4 Working with bibliographies and indices	16

APPENDIX	PAGE
A Typesetting Mathematical Formulae	18
A.1 General	18
A.2 Grouping in Math Mode	20
A.3 Building Blocks of a Mathematical Formula	20
A.4 Math Spacing	24
A.5 Vertically Aligned Material	24
A.6 Math Font Size	26
A.7 Theorems, Laws, ...	27
A.8 Bold symbols	28
A.9 List of Mathematical Symbols	29

B Examples of Java Code	35
C C++ Examples	37
D Cover and Copyright Examples	39
Afterword	41
References	43
Index	44

LIST OF FIGURES

Figure	Page
3.1 Our first picture	9
3.2 Conchoid.	10
3.3 Tree diagram	11
3.4 Intersecting lines	11
3.5 Minipage example	12
3.6 What goes in the List of Figures	13
3.7 Right	13
3.8 Two pictures in one figure	13
(a) What goes in the List	13
(b) What goes in the List	13
D.1 Options for the IS Cover Page	39
(a) Grayscale Scottie Mascot	39
(b) Grayscale Wooster 'W'	39
D.2 woostercopytight option	40

LIST OF TABLES

Table	Page
3.1 Our first table	14
3.2 Our first table again	14
3.3 Reduction of curvature by each reprojection method	15
A.1 Math Mode Accents.	29
A.2 Lowercase Greek Letters.	29
A.3 Uppercase Greek Letters.	29
A.4 Binary Relations.	30
A.5 Binary Operators.	30
A.6 BIG Operators.	30
A.7 Arrows.	31
A.8 Delimiters.	31
A.9 Large Delimiters.	31
A.10 Miscellaneous Symbols.	31
A.11 Non-Mathematical Symbols.	32
A.12 AMS Delimiters.	32
A.13 AMS Greek and Hebrew.	32
A.14 AMS Binary Relations.	32
A.15 AMS Binary Relations Continued.	32
A.16 AMS Arrows.	33
A.17 AMS Negated Binary Relations and Arrows.	33
A.18 AMS Binary Operators.	33
A.19 AMS Miscellaneous.	34
A.20 Math Alphabets.	34

LIST OF LISTINGS

Listing	Page
2.1 Find the location of the largest even integer in a list	7
2.2 Quaternary search	8
B.1 Clock Code	35
B.2 Consumer	36
B.3 EvilEmpire Code	36
C.1 Motion Class	37
C.2 Plotter Class	37
C.3 Simulation Class	38

PREFACE

The purpose of this document is to provide you with a template for typesetting your IS using $\text{\LaTeX}$. $\text{\LaTeX}$ is very similar to HTML in the sense that it is a markup language. What does this mean? Well, basically it means you need only enter the commands for structuring your IS, i.e., identify chapters, sections, subsections, equations, quotes, etc. You do not need to worry about any of the formatting. The `woosterthesis` class takes care of all the formatting.

Here is how I plan on introducing you to $\text{\LaTeX}$. The Introduction gives some reasons for why one might find $\text{\LaTeX}$ superior to MS WordTM. Chapter 2 will demonstrate how one starts typesetting a document and works with text in $\text{\LaTeX}$. Chapter 3 discusses the creation of tables and how one puts figures into a thesis. Chapter 4 talks about creating a bibliography/references section and an index. There are three Appendices which discuss typesetting mathematics and computer program code. The Afterword will discuss some of the particulars of how a $\text{\LaTeX}$ document gets processed and what packages the `woosterthesis` class uses and are assumed to be available on your system.

Hopefully, this document will be enough to get you started. If you have questions, please refer to Mittelbach *et al.* [1], Kopka & Daly [2], Oetiker *et al.* [3], Feuerstack [4], and Flynn [5], or Grätzer [6].

CHAPTER 1

INTRODUCTION

So why would you want to use $\text{\LaTeX}$ instead of Microsoft WordTM? I can think of several reasons. The main one for this author is that $\text{\LaTeX}$ takes care of all the numbering automatically. This means that if you decide to rearrange material in your IS, you do not have to worry about renumbering or references. This makes it very easy to play around with the structure of your thesis. The second reason is that it is ultimately faster than WordTM. How? Well, after a week or so of using $\text{\LaTeX}$, you will begin to remember the commands that you use frequently and won't have to use the $\text{\LaTeX}$ pallet in TeXShop or TeXworks. So, you can just type everything including the mathematics, where with WordTM you would have to use the Equation Editor.

I have also tried to make things more efficient by organizing the example folder as follows. There is a `main.tex` file which is what you will enter all the information about your IS into and is the document you will typeset. `main.tex` also has explanations about other files that you might need to edit. In addition, there are folders for chapters, appendices, styles, and figures. This structure is there to try and reduce file clutter and to help you stay organized. There should also be a `.bib` file which you can use as a model for your own `.bib` file. The `.bib` file has your bibliographic information.

$\text{\LaTeX}$ is easy to learn. For an average IS, the author will only need to learn a handful of commands. For this small bit of effort, you get a tremendous amount of flexibility and a very beautiful document. The following chapters will introduce some of the common things a student might need to do in a thesis.

1.1 WHAT IS IN MAIN.TEX?

Before we move on let's talk a little bit about what is at the beginning of `main.tex`. The file starts with `\documentclass{woosterthesis}`, which must be at the beginning of every IS. In the brackets are options for the `woosterthesis` class. The options are the same as for the `book` class with some additional options `abstractonly`, `acs`, `alltt`, `apa`, `blacklinks`, `chicago`, `citeorder`, `code`, `colophon`, `dropcaps`, `euler`,

foreignlanguage, guass, index, kaukecopyright, maple, minimalstyle, mla, nostyle, palatino, picins, scottie, singlespace, tikz, verbatim, wblack, and woostercopyright. If no options are specified then the class default options letterpaper, 12pt, oneside, onecolumn, final, and openany are used.

The abstractonly option will allow you to print just the Abstract. The acs option implements the American Chemical Society citation and reference style. The alltt option loads the alltt package for using typewriter type in various ways and the apa option implements the APA citation and reference style. The blacklinks option will make the hyperlinks in the PDF version of the thesis black and suitable for printing; normally the links are colored to provide visual clues to the reader. The chicago option implements Chicago style citation and references. The citeorder option orders the references according to the citation order of the IS. The code option will use listings style to format program code examples. The colophon option will include a colophon which is a section that describes the fonts and other settings used to produce the manuscript. dropcaps loads the lettrine package for doing dropped capitals and the euler and guass options load the woofncychap package with the named option which will change the look of chapter headings. The foreignlanguage option will load the csquotes package and either the polyglossia or babel package depending on if XeTeX is being used to allow the input and formatting of sections of text in a foreign language. The index option will allow the makeidx package to be loaded so that if you have index entries they will be added to an index (this requires additional steps). The kaukecopyright option will put the Kauke Hall symbol with the pre 2021 wordmark on the copyright page. The maple option will load the Maple package for including Maple code. The minimalstyle option will use custom styling for the Table of Contents and List of Figures, Tables, and Listings and otherwise revert to the default book class styles. The mla option implements the MLA citation and reference style. The nostyle option will remove all custom styling and revert to the default book class styles. The palatino option will use the pxfonts package which uses the Palatino fonts. The picins option will use the wrapfig package to allow text to wrap around images and verbatim allows one to set verbatim what is entered. The tikz option loads the TikZ package enabling users to draw figures in their L^AT_EX document. The singlespace option will use the setspace package to typeset the document in singlespace. The wblack option includes an opaque Wooster "W" (as of 8/2021) in the background of the title page instead of the default opaque Kauke Hall image, the scottie option includes an opaque grayscale image of the Scottie mascot in the background of the title page instead of the default opaque Kauke Hall image, and the woostercopyright option includes a copyright notice with the new (as of 8/2021) Wooster wordmark (see Appendix D for images of what these options produce). Adding or deleting options from the comma separated list will change the appearance of the document and some options should only be used after consulting your advisor. Now let's move on to some other things that you'll need to deal with: text, figures, pictures, and tables.

CHAPTER 2

IN THE BEGINNING: KNUTH SAID “LET THERE BE T_EX”

Now that I’ve tried to convince you that L^AT_EX is going to be better than Word™ for your IS, you’re saying, “So how do I use it?” Well let’s start with some basic things. First, how is a document structured in L^AT_EX?

A *document* for L^AT_EX is all the stuff that comes between the `\begin{document}` and `\end{document}` tags. The `main.tex` file has the `\begin{document}` and `\end{document}` tags. “OK, but how do I get my chapters to print?” You save the chapters in the `chapters` folder and put an `\include{chapters/chaptername}` command in `main.tex` after the `\begin{document}` and before the `\end{document}` tag. `main.tex` already has some examples of including chapters (lines 247 through 255); you can just alter them to have your chapter names. I should also mention that the `%` symbol is used for comments. The `main.tex` file has several comments that are intended for you and try to explain what is happening. Oh, and if you need a `%` symbol enter `\%`.

Now to write your first chapter. I would recommend saving this chapter (`chapter1.tex`) under a different name and making changes to the new copy, of course you can just edit the existing `chapter1.tex` file. The most basic structural elements that you need to know are the paragraph, `\chapter`, `\section`, and `\subsection`. A new paragraph is obtained by putting a blank line in the source file. The other commands are very easy to use. If I want to start a new section I enter `\section[My new section]{An example of making a new section and giving it a short name}` (the part in square brackets is optional) and get

2.1 AN EXAMPLE OF MAKING A NEW SECTION AND GIVING IT A SHORT NAME

The `\chapter` and `\subsection` commands work in the same manner. Each new chapter must have `\chapter[short name]{chapter name}` as its first line.

“Hey, wait a minute. What if I need to refer to that section? How can I do that?” It’s actually as simple as adding `\label{labelname}` at the end of the `\chapter` command like `\section[My new section]{An example of making a new section and giving it a short name}\label{sec:newsec}`. Now I can

refer to Section 2.1 by typing `\ref{sec:newsec}`. You can label just about anything and refer to the label to get an automatically generated number for the item. This means that you need to come up with a labeling scheme before you start writing and stick with it.

Some other things you'll need to be able to do include italicizing and bolding text and creating lists. These are also easy to accomplish. For example, I can use `\emph` or `\textit` to italicize text. To italicize homework, I would enter `\emph{homework}` or `\textit{homework}` to produce *homework*. To obtain **bold** text you would use the `\textbf` command. And what about lists?

There are several kinds of lists (enumerated, itemized, and descriptive) and each has its own place and environment. An enumerated list is good for outlining or ordered lists:

```
\begin{enumerate}
\item First main idea
\begin{enumerate}
\item First subpoint
\item\label{enum:1b} Second subpoint
\end{enumerate}
\item Second main idea
\end{enumerate}
```

1. First main idea
 - (a) First subpoint
 - (b) Second subpoint
2. Second main idea

The itemized list is good for unordered lists or bullet points:

```
\begin{itemize}
\item Idea
\item Idea
\item Idea
\item Idea
\end{itemize}
```

- Idea
- Idea
- Idea
- Idea

And the descriptive list is good for definitions; however, `amsthm` already has a definition environment, and you will most likely not need the description environment. In any event, here is an example:

```
\begin{description}
\item[First item:] Idea
\item[Second item:] Idea
\item[Third item:] Idea
\end{description}
```

- First item:** Idea
- Second item:** Idea
- Third item:** Idea

Notice the use of brackets in the last example. The brackets are optional and the text in the brackets is used as the label for the item. You should also note that you can label an item for later reference see 1b. There are several options for changing the format of the list environments and a package, `paralist`, for customizing lists which are described in section 3.3 of Mittelbach *et al.* [1].

2.2 THEOREMS, DEFINITIONS, EXAMPLES, OH MY!

The next thing you'll probably need to do is enter definitions, theorems, and examples. Below you will find some examples. On the left you will see the text typed into the document and on the right what it looks like when formatted. These examples are intended to give you a sense of what type of mathematical expressions L^AT_EX handles. You should look at Appendix A for a more complete discussion of entering mathematics. In the beginning you will not know all the commands that you need to enter. Don't worry. Each of the suggested editors has a palette that shows you a picture of what you want and puts the correct commands into the document when you click the picture. As you look at these examples, keep it in mind that some of them use some user defined commands which can be found in `styles/personal.tex`. Now let's look at Definition 2.1, Theorem 2.1, and equation 2.3.

```
\begin{defn}[One of Ramanujan's
third order mock theta
functions]\label{def1}
\begin{equation}\label{introf(q)}
f(q)=1+\sum_{y=1}^{\infty}
\frac{q^{y^2}}{(1+q)^2(1+q^2)^2\cdots(1+q^y)^2}.
\end{equation}\end{defn}
```

Definition 2.1 ONE OF RAMANUJAN'S THIRD ORDER MOCK THETA FUNCTIONS:

$$f(q) = 1 + \sum_{y=1}^{\infty} \frac{q^{y^2}}{(1+q)^2(1+q^2)^2 \cdots (1+q^y)^2}. \quad (2.1)$$

```
\begin{thm}[Watson's
transformation of
$f(q)$]\label{introwatthm}
\begin{equation}\label{introf}
\frac{q}{\prod_{y=0}^{\infty} (1+q^{y^2})} = 1 +
\sum_{y=1}^{\infty} \frac{(-1)^y q^{(3/2)y^2 + (1/2)y}}{(1+q^y)^2}.
\end{equation}\end{thm}
```

Theorem 2.1 (Watson's transformation of $f(q)$).

$$(q)_{\infty} \sum_{y=0}^{\infty} q^{y^2} (-q)_y^{-2} = 1 + \sum_{y=1}^{\infty} \frac{(-1)^y 4q^{(3/2)y^2 + (1/2)y}}{(1+q^y)^2}. \quad (2.2)$$

This is a more complicated example which uses the `\substack` command to have multiple summation criteria.

$$[NUM]_1^{(\ell)}(q; b; \mathbf{x}) = q \sum_{0 \leq r, t \leq \ell-1} q^{r+t} \sum_{\substack{\lambda \vdash (r+t) \\ \lambda / 1^r \in V_t \\ \ell(\lambda) \leq \ell-1}} s_{(b, \lambda)}(\mathbf{x}). \quad (2.3)$$
$$A_{y_1} := \begin{cases} 1 & \text{for } y_1 = 0, \\ \frac{(-1)^{y_1} 4q^{y_1} q^{\binom{y_1}{2}}}{(q)_{2y_1} (1+q^{y_1})} & \text{for } y_1 > 0 \end{cases} \quad (2.4a)$$
$$B_{y_1} := (-q)_{y_1}^{-1} (-q)_{y_1}^{-1} = (-q)_{y_1}^{-2} \quad . \quad (2.4b)$$

Example 2.1 (An example example). This is an example of including an example. Kind of silly isn't it.

There is one last textual item which Computer Science majors and probably some Mathematics majors will need to incorporate, pseudocode. To do this I would suggest using the `\lstlisting` environment. Below is an example set up for the `listings` package. You could put your modifications to this set up into the `personal.tex` file in the `styles` folder. Documentation on the `listings` package can be found in the `doc` folder with the documentation for the other packages.

```
\lstset{
  language =Pascal, % pick a language style
  emph={return,natural, numbers, integers, increasing},
  emphstyle={\bfseries},% choose other keywords and a format
  linewidth=.95{\textwidth}, breaklines=true,commentstyle=\textit,
  stringstyle=\upshape,showspaces=false,numbers=left,
  numberstyle=\tiny,basicstyle=\small,xleftmargin=30pt,
  breakautoindent=true,captionpos=b
}
```

The listing in Listing 2.1 gives an algorithm for finding the largest even integer in a given list of n integers. I have used the `mathescape` option to be able to incorporate mathematics in the listing. The actual code put in the thesis is given first and the formatted output follows.

```
\begin{lstlisting}[mathescape, caption= Find the location
of the largest even integer in a list,label=largesteven]
procedure $largestevenlocation$( $a_1$ ,  $a_2$ , \ldots,  $a_n$ : integers)
 $k$ :=0
 $largest$ := $-\infty$ 
for  $i$ :=1 to  $n$ 
  if ( $a_i$  is even and  $a_i > largest$ ) then
    begin
       $k$ := $i$ 
       $largest$ := $a_i$ 
    end
end
return  $k$ 
\end{lstlisting}
```

```
1  procedure largestevenlocation( $a_1, a_2, \dots, a_n$ : integers)
2   $k$ :=0
3   $largest$ := $-\infty$ 
4  for  $i$ :=1 to  $n$ 
5    if ( $a_i$  is even and  $a_i > largest$ ) then
6      begin
7         $k$ := $i$ 
8         $largest$ := $a_i$ 
9      end
10 end
11 return  $k$ 
```

Listing 2.1: Find the location of the largest even integer in a list

The code in Listing 2.2 is an improvement on Binary search. The algorithm reduces the size of the search by a factor of four at each iteration. It provides another example of using the `\lstlisting` environment.

```
\begin{lstlisting}[mathescape,caption=Quartary search,
label=quartsearch]
procedure $quartarysearch$( $x$ : integer,  $a_1$ ,  $a_2$ ,
\ldots,  $a_n$ : increasing integers)
 $i$ := $1$ 
 $j$ := $n$ 
```

```

while $i<j-2$
begin
  $l:=\lfloor(i+j)/4\rfloor$
  $m:=\lfloor(i+j)/2\rfloor$
  $u:=\lfloor 3(i+j)/4\rfloor$
  if $x>a_m$ then
    if $x\leq a_u$ then
      begin
        $i:=m+1$
        $j:=u$
      end
    else
      $i:=u+1$
    else if $x>a_l$ then
      begin
        $i:=l+1$
        $j:=m$
      end
    else $j:=l$
  end
  if $x=a_i$ then $location:= i$
  else if $x=a_j$ then $location:= j$
  else if $x=a_{\lfloor(i+j)/2\rfloor}$ then
    $location:= \lfloor(i+j)/2\rfloor$
  else $location:= 0$
  return $location$
\end{lstlisting}

```

```

1  procedure quartarysearch( $x$ : integer ,  $a_1, a_2, \dots, a_n$ : increasing integers)
2   $i:=1$ 
3   $j:=n$ 
4  while  $i < j - 2$ 
5  begin
6     $l := \lfloor (i+j)/4 \rfloor$ 
7     $m := \lfloor (i+j)/2 \rfloor$ 
8     $u := \lfloor 3(i+j)/4 \rfloor$ 
9    if  $x > a_m$  then
10     if  $x \leq a_u$  then
11       begin
12          $i := m + 1$ 
13          $j := u$ 
14       end
15     else
16        $i := u + 1$ 
17     else if  $x > a_l$  then
18       begin
19          $i := l + 1$ 
20          $j := m$ 
21       end
22     else  $j := l$ 
23   end
24   if  $x = a_i$  then  $location := i$ 
25   else if  $x = a_j$  then  $location := j$ 
26   else if  $x = a_{\lfloor (i+j)/2 \rfloor}$  then  $location := \lfloor (i+j)/2 \rfloor$ 
27   else  $location := 0$ 
28   return  $location$ 

```

Listing 2.2: Quartary search

WORKING WITH FIGURES AND TABLES

3.1 GETTING A SIMPLE FIGURE IN THE DOCUMENT

In this chapter we want to talk about including figures and tables in the document. To insert a simple figure, you can enter something like

```
\begin{figure}[!ht]
\begin{center}
\woopic{picture3}{.8}
\end{center}
\caption{Our first
picture}\label{first}
\end{figure}
```




Figure 3.1: Our first picture

The `!ht` tell $\text{\LaTeX}$ to try and place the figure here no matter what or at the top of the next page. The `\woopic` command takes the name of the picture as the first argument and the scaling factor as the second argument. The scaling factor must be between zero and one and the figure name must have *no spaces*. Your figures can be in one of four formats: `jpg`, `png`, `tif`, or `pdf`. Captions are placed below the figure and your label should be placed after the caption.

In the next example we are using the woosterthesis option `picins` to typeset a picture inside a paragraph and have the text wrap around the figure. This option loads the `wrapfig` package. One thing to note is that the figures placed in this manner do not float with the other figures and as such numbering could get out of sequence. Keep an eye out for such behavior. This technique should be used sparingly in your thesis.

```
\newcommand{\sample}{Some text that is reused over and over
again in the example. }
\begin{wrapfigure}{r}{2.2in}
\woopic{picture2}{.4}
\caption{Conchoid.}
\end{wrapfigure}
\sample\sample\sample\sample
```

Some text that is reused over and over again in the example. Some text that is reused over and over again in the example. Some text that is reused over and over again in the example. Some text that is reused over and over again in the example. Some text that is reused over and over again in the example. Some text that is reused over and over again in the example. Some text that is reused over and over again in the example. Some text that is reused over and over again in the example. Some text that is reused over and over again in the example. Some text that is reused over and over again in the example.

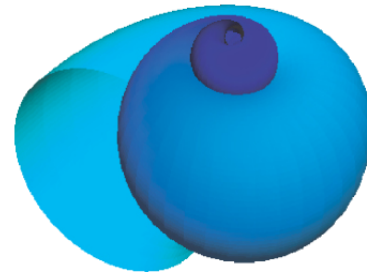


Figure 3.2: Conchoid.

3.1.1 DRAWING FIGURES IN L^AT_EX

It is also possible to use the `TikZ` package to draw figures like Figures 3.3 or 3.4 in your document. `TikZ/PGF` are a pair of languages that allow users to create vector graphics as part of their L^AT_EX document using commands that are T_EX macros. It is possible to create extremely complex scalable graphics using `TikZ`, see the [TikZ wikipedia entry](#) for some examples.

```
\begin{figure}[!ht]\centering
\begin{tikzpicture}[
roundnode/.style={circle, draw=green!60, fill=green!5, very thick, minimum size=7mm},
squarednode/.style={rectangle, draw=red!60, fill=red!5, very thick, minimum size=5mm},
]
%Nodes
\node[squarednode]      (maintopic)                                {2};
\node[roundnode]        (uppercircle)      [above=of maintopic] {1};
\node[squarednode]      (rightsquare)      [right=of maintopic] {3};
\node[roundnode]        (lowercircle)      [below=of maintopic] {4};
%Lines
\draw[->] (uppercircle.south) -- (maintopic.north);
\draw[->] (maintopic.east) -- (rightsquare.west);
\draw[->] (rightsquare.south) .. controls +(down:7mm) and +(right:7mm) .. (lowercircle.east);
\end{tikzpicture}
\caption{Tree diagram}\label{tree}
\end{figure}
```




Figure 3.3: Tree diagram

```

\begin{figure}[!ht]\centering
\begin{tikzpicture}
\draw[gray, thick] (-1,2) -- (2,-4);
\draw[gray, thick] (-1,-1) -- (2,2);
\filldraw[black] (0,0) circle (2pt) node[anchor=west]{Intersection point};
\end{tikzpicture}
\caption{Intersecting lines}\label{lines}
\end{figure}

```

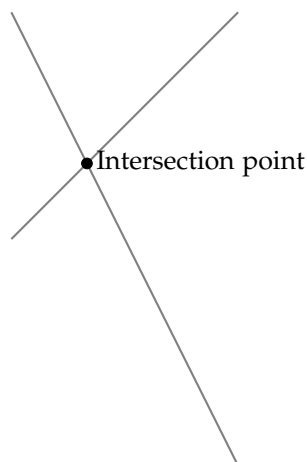


Figure 3.4: Intersecting lines

3.1.2 MINIPAGES

You can also create minipages in your documents to accomplish more complicated formatting. For example, you could try the following which produces Figure 3.5.

```

\begin{minipage}[t][3 in][t]{1 in}
This is a minipage which is 3 in tall and 1 in wide.
Top Text Text Text Text.\end{minipage}\hfill
\begin{minipage}[t][3 in][c]{1 in}
This is a minipage which is 3 in tall and 1 in wide.
Center Text Text Text Text.\end{minipage}\hfill
\begin{minipage}[t][3 in][b]{1 in}

```

This is a minipage which is 3 in tall and 1 in wide.
 Bottom Text Text Text Text.\end{minipage}

This is a mini-
 page which is 3
 in tall and 1 in
 wide. Top Text
 Text Text Text.

This is a mini-
 page which is 3
 in tall and 1 in
 wide. Center
 Text Text Text
 Text.

This is a mini-
 page which is 3
 in tall and 1 in
 wide. Bottom
 Text Text Text
 Text.

Figure 3.5: Minipage example

In the example above, the syntax `\begin{minipage}[t][3 in][t]{1 in}` follows the convention `\begin{minipage}[minipageposition][height][textposition]{width}`

3.1.3 HOW TO GET MORE THAN ONE PICTURE IN THE SAME FIGURE

You can use minipages to put more than one picture in a figure. Here is an example of how to do this.

```
\begin{minipage}[!ht]{6cm}
\woopic{picture1}{.4}
\par
\caption[What goes in the List of Figures]{Left}
\end{minipage}
\hfill
\begin{minipage}[!ht]{6cm}
\woopic{picture2}{.4}
\end{picture}\par
\caption{Right}
\end{minipage}
```

You can also use the subfig package to do this.

```
\begin{figure}[!ht]\centering
\subfloat[What goes in the List][Large conchoid]
{\woopic{picture1}{.4}\label{fig3:left}}
```

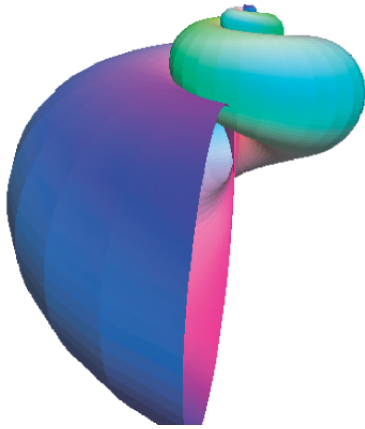


Figure 3.6: Left



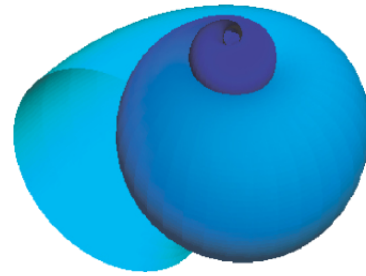


Figure 3.7: Right

```
\quad
\subfloat[What goes in the List][Small conchoid]
{\woopic{picture2}{.4}\label{fig3:right}}
\caption{Two pictures in one figure}\label{fig3}
\end{figure}
```

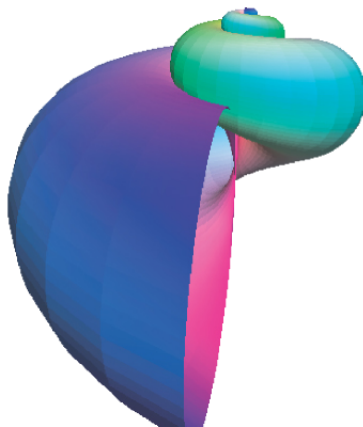

(a) Large conchoid

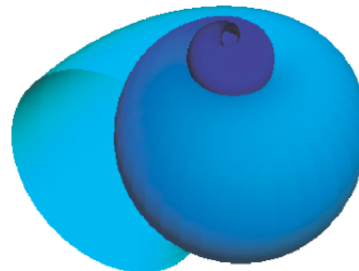

(b) Small conchoid

Figure 3.8: Two pictures in one figure

We should now be able to refer to either Figure 3.8 (a) or Figure 3.8 (b) using the labels we gave to the left and right images.

The reader is referred to Chapters 8, 9, and 16 of Kopka & Daly [2] or to Chapters 6 and 10 of Mittelbach *et al.* [1] for a complete discussion of figures and graphics.

3.2 TABLES

Tables are easy to set up. Here is a simple table:

```

\begin{table}[!ht]
\begin{center}
\caption{Our first table}
\begin{tabular}{r l}
$\underline{\textnormal{District}}$ &
$\underline{\textnormal{Population}}$ \\
Applewood & 8280 \\
Boxwood & 4600 \\
Central & 5220
\end{tabular}
\caption{Our first table}
\end{center}
\end{table}

```

Table 3.1: Our first table

<u>District</u>	<u>Population</u>
Applewood	8280
Boxwood	4600
Central	5220

In `\begin{tabular}{r l}` the two “r” and “l” indicate that we have two columns with right and left aligned entries and no lines dividing cells or around the table. I can make the table look more like a spreadsheet by doing:

```

\begin{table}[!ht]
\begin{center}
\caption{Our first table again}
\begin{tabular}{|r|l|}
\hline
{\textnormal{District}} &
{\textnormal{Population}} \\
\hline
Applewood & 8280 \\
\hline
Boxwood & 4600 \\
\hline
Central & 5220 \\
\hline
\end{tabular}
\end{center}
\end{table}

```

Table 3.2: Our first table again

District	Population
Applewood	8280
Boxwood	4600
Central	5220

Here is a more complicated example of a table.

```

\begin{table}[!ht]
\caption{Reduction of curvature by each reprojection method\label{tbl:kreduce}}
\centerline{
\begin{tabular}{|l||r|r|r|} \hline
\emph{Reprojection} & \multicolumn{3}{|c|}{\emph{Largest
Reduction of Curvature}} \\
& \emph{Average} \\ \cline{2-4}
\emph{Method} & \emph{Original} & \emph{Reprojected} &
\emph{at} &
\emph{Reduction} \\
& \emph{Curvature} & \emph{Curvature} &
\emph{Rotation} & \emph{of Curvature} \\ \hline \hline
ZEEL & 0.0358 & 0.0245 &
$\degree{45}$ & 0.0050 \\ \hline
ZEEL ext. & 0.0358 & 0.0245 &
$\degree{45}$ & 0.0059 \\ \hline
Regridding & 0.0428 & 0.0166 &
$\degree{75}$ & 0.0159 \\ \hline
Block & 0.0358 & 0.0103 &
$\degree{45}$ & 0.0163 \\ \hline
\end{tabular}
}
\end{table}

```

Table 3.3: Reduction of curvature by each reprojection method

Reprojection Method	Largest Reduction of Curvature			Average Reduction of Curvature
	Original Curvature	Reprojected Curvature	at Rotation	
ZEEL	0.0358	0.0245	45°	0.0050
ZEEL ext.	0.0358	0.0245	45°	0.0059
Regridding	0.0428	0.0166	75°	0.0159
Block	0.0358	0.0103	45°	0.0163

Please refer to Chapter 6 of Kopka & Daly [2] for a complete discussion of tables and tabular environments.

4

CHAPTER

WORKING WITH BIBLIOGRAPHIES AND INDICIES

I would highly recommend that you use Bib $\LaTeX$ for your bibliography, and that is what this class uses as of August 2022. Bib $\LaTeX$ supports foreign languages and UTF-8 and provides several styles for formatting references (ACS, Chicago, APA, Turabian). For many people it also is easier to customize than Bib $\TeX$ with natbib, should you need to customize the formatting of references. Bib $\LaTeX$ also can make use of the Biber reference processing application which provides support for foreign languages and more sophisticated sorting options than Bib $\TeX$. You still process a special .bib file. The .bib file is where you enter your bibliographic information. Sample entries look something like

```
@article{feu02,  
author= {Thomas Feuerstack},  
title= {Introduction to pdf{\TeX{}}},  
journal= {TUGboat},  
volume= {23},  
pages= {329--334},  
number= {3/4},  
url= {http://www.tug.org/TUGboat/Articles/tb23-3-4/tb75feu.pdf},  
year= 2002}
```

or

```
@book{mgbcr04,  
author= {Frank Mittelbach and Michel Goossens and  
Johannes Braams and David Carlisle and Chris Rowley},  
title= {The \LaTeX\ Companion},  
publisher= {Addison Wesley Professional},  
edition= {2nd},  
address= {New York},  
year= 2004}
```

For a Web site I would recommend the following

```
@misc{brei04,
author = {Jon Breitenbucher},
title = {{W}ooster related {L}a{T}e{X} files},
url = {https://woolatex.spaces.wooster.edu},
howpublished= {World Wide Web},
year= 2021,
note = {Accessed on 09/27/2021}}
```

You can make a reference by typing `\citet{mgbcr04}` to produce Mittelbach *et al.* [1]. Other forms for citation include `\citep{mgbcr04}` or `\citeauthor{mgbcr04}` to produce [1] or Mittelbach *et al.* respectively. You can consult Kopka & Daly [2] or Mittelbach *et al.* [1] to find out how to format entries in the .bib file and what options each reference type has.¹

Indicies are also relatively easy to create. If I wanted to have Wooster show up in the index, I would enter `Wooster\index{Wooster}` in my source file. I could create a subentry for User Services by entering `User Services\index{Wooster!User Services}`. A subsubentry for Help Desk would be entered as `\index{Wooster!User Services!Help Desk}`.

To create the index, one needs to make sure to uncomment the `\makeindex` command in the `main.tex` file. One also needs to uncomment the `makeidx` entry in the `styles/packages.tex` file and then run the `Makeindex` program. Consult Kopka & Daly [2] or Mittelbach *et al.* [1] for further information.

¹You could also use footnotes if your department called for that.

APPENDIX A

TYPESETTING MATHEMATICAL FORMULAE

This appendix is taken from Oetiker *et al.* [3] under the GNU open-source documentation license. This appendix addresses the main strength of $\text{\TeX}$: mathematical typesetting. But be warned, this appendix only scratches the surface. While the things explained here are sufficient for many people, don't despair if you can't find a solution to your mathematical typesetting needs here. It is highly likely that your problem is addressed in $\mathcal{A}\mathcal{M}\mathcal{S}\text{-}\text{\LaTeX}$ ¹ or some other package.

A.1 GENERAL

$\text{\LaTeX}$ has a special mode for typesetting mathematics. Mathematical text within a paragraph is entered between `\(` and `\)`, between `$` and `$` or between `\begin{math}` and `\end{math}`.

Add `$a$` squared and `$b$` squared
to get `$c$` squared. Or, using
a more mathematical approach:
`$c^{\{2\}}=a^{\{2\}}+b^{\{2\}}$`

Add a squared and b squared to get c squared. Or, using a more
mathematical approach: $c^2 = a^2 + b^2$

`\TeX{\}` is pronounced as
`$\tau\epsilon$` of water
`100\text{m}^3$` of water
This comes from my `$\heartsuit$`

$\text{\TeX}$ is pronounced as $\tau\epsilon$.
100 m³ of water
This comes from my ♥

It is preferable to *display* larger mathematical equations or formulae, rather than to typeset them on separate lines. This means you enclose them in `\[` and `\]` or between `\begin{displaymath}` and `\end{displaymath}`. This produces formulae which are not numbered. If you want $\text{\LaTeX}$ to number them, you can use the equation environment.

¹CTAN:/tex-archive/macros/latex/packages/amslatex

Add a squared and b squared to get c squared. Or, using a more mathematical approach:

```
\begin{displaymath}
c^2=a^2+b^2
\end{displaymath}
```

And just one more line.

Add a squared and b squared to get c squared. Or, using a more mathematical approach:

$$c^2 = a^2 + b^2$$

And just one more line.

You can reference an equation with `\label` and `\ref`

```
\begin{equation} \label{eq:eps}
\epsilon > 0
\end{equation}
From (\ref{eq:eps}), we gather
\ldots
```

$$\epsilon > 0 \tag{A.1}$$

From (A.1), we gather ...

Note that expressions will be typeset in a different style if displayed:

```
\lim_{n \to \infty}
\sum_{k=1}^n \frac{1}{k^2}
= \frac{\pi^2}{6}
```

$$\lim_{n \rightarrow \infty} \sum_{k=1}^n \frac{1}{k^2} = \frac{\pi^2}{6}$$

```
\begin{displaymath}
\lim_{n \to \infty}
\sum_{k=1}^n \frac{1}{k^2}
= \frac{\pi^2}{6}
\end{displaymath}
```

$$\lim_{n \rightarrow \infty} \sum_{k=1}^n \frac{1}{k^2} = \frac{\pi^2}{6}$$

There are differences between *math mode* and *text mode*. For example, in *math mode*:

1. Most spaces and linebreaks do not have any significance, as all spaces either are derived logically from the mathematical expressions or have to be specified using special commands such as `\,`, `\quad`, or `\qquad`.
2. Empty lines are not allowed. Only one paragraph per formula.
3. Each letter is considered to be the name of a variable and will be typeset as such. If you want to typeset normal text within a formula (normal upright font and normal spacing) then you have to enter the text using the `\textrm{...}` commands.

```
\begin{equation}
\forall x \in \mathbf{R}:
\quad x^2 \geq 0
\end{equation}
```

$$\forall x \in \mathbf{R}: \quad x^2 \geq 0 \tag{A.2}$$

```
\begin{equation}
x^{\{2\}} \geq 0 \qquad
\text{\texttrm{for all } } x \text{\in\mathbf{R}}
\end{equation}
```

$$x^2 \geq 0 \quad \text{for all } x \in \mathbf{R} \quad (\text{A.3})$$

Mathematicians can be very fussy about which symbols are used: it would be conventional here to use ‘blackboard bold’, bold symbols which is obtained using `\mathbb` from the package `amsfonts` or `amssymb`.

The last example becomes

```
\begin{displaymath}
x^{\{2\}} \geq 0 \qquad
\text{\texttrm{for all } } x \text{\in\mathbb{R}}
\end{displaymath}
```

$$x^2 \geq 0 \quad \text{for all } x \in \mathbb{R}$$

A.2 GROUPING IN MATH MODE

Most math mode commands act only on the next character. So if you want a command to affect several characters, you have to group them together using curly braces: `{...}`.

```
\begin{equation}
a^{x+y} \neq a^{x+y}
\end{equation}
```

$$a^x + y \neq a^{x+y} \quad (\text{A.4})$$

A.3 BUILDING BLOCKS OF A MATHEMATICAL FORMULA

In this section, the most important commands used in mathematical typesetting will be described. Take a look at Kopka & Daly [2] for a detailed list of commands for typesetting mathematical symbols.

Lowercase Greek letters are entered as `\alpha`, `\beta`, `\gamma`, ..., uppercase letters are entered as `\Gamma`, `\Delta`, ...²

```
\lambda, \xi, \pi, \mu, \Phi, \Omega
```

$$\lambda, \xi, \pi, \mu, \Phi, \Omega$$

Exponents and Subscripts can be specified using the `^` and the `_` character.

²There is no uppercase Alpha defined in $\text{\LaTeX} 2_\epsilon$ because it looks the same as a normal roman A. Once the new math coding is done, things will change.

```

$a_{1}$ \quad $x^{2}$ \quad
$e^{-\alpha t}$ \quad
$a^{3}_{ij}$\
$e^{x^2} \neq e^{x^2}$

```

$$a_1 \quad x^2 \quad e^{-\alpha t} \quad a_{ij}^3 \\ e^{x^2} \neq e^{x^2}$$

The **square root** is entered as `\sqrt`, the n^{th} root is generated with `\sqrt[n]`. The size of the root sign is determined automatically by L^AT_EX. If just the sign is needed, use `\surd`.

```

$\sqrt{x}$ \quad
$\sqrt{x^2+\sqrt{y}}$
\quad $\sqrt[3]{2}$\
$\surd[x^2 + y^2]$

```

$$\sqrt{x} \quad \sqrt{x^2 + \sqrt{y}} \quad \sqrt[3]{2} \\ \surd[x^2 + y^2]$$

The commands `\overline` and `\underline` create **horizontal lines** directly over or under an expression.

```
$\overline{m+n}$
```

$$\overline{m+n}$$

The commands `\overbrace` and `\underbrace` create long **horizontal braces** over or under an expression.

```
$\underbrace{a+b+\cdots+z}_{26}$
```

$$\underbrace{a+b+\cdots+z}_{26}$$

To add mathematical accents such as small arrows or tilde signs to variables, you can use the commands given in Kopka & Daly [2]. Wide hats and tildes covering several characters are generated with `\widetilde` and `\widehat`. The ' symbol gives a prime.

```

\begin{displaymath}
y=x^2\quad y'=2x\quad y''=2
\end{displaymath}

```

$$y = x^2 \quad y' = 2x \quad y'' = 2$$

Vectors often are specified by adding a small arrow symbol on top of a variable. This is done with the `\vec` command. The two commands `\overrightarrow` and `\overleftarrow` are useful to denote the vector from A to B .

```

\begin{displaymath}
\vec{a} \quad \overrightarrow{AB}
\end{displaymath}

```

$$\vec{a} \quad \overrightarrow{AB}$$

Names of log-like functions are often typeset in an upright font and not in italic like variables. Therefore L^AT_EX supplies the following commands to typeset the most important function names:

```
\arccos \cos \csc \exp \ker \limsup \min \sinh
\arcsin \cosh \deg \gcd \lg \ln \Pr \sup
\arctan \cot \det \hom \lim \log \sec \tan
\arg \coth \dim \inf \liminf \max \sin \tanh
```

```
\[\lim_{x \rightarrow 0}
\frac{\sin x}{x}=1\]
```

$$\lim_{x \rightarrow 0} \frac{\sin x}{x} = 1$$

For the modulo function, there are two commands: `\bmod` for the binary operator “ $a \bmod b$ ” and `\pmod` for expressions such as “ $x \equiv a \pmod{b}$.”

A built-up **fraction** is typeset with the `\frac{...}{...}` command. Often the slashed form $1/2$ is preferable, because it looks better for small amounts of ‘fraction material.’

```
$1\frac{1}{2}$~hours
\begin{displaymath}
\frac{x^2}{k+1} \quad \quad
x^{\frac{2}{k+1}} \quad \quad
x^{1/2}
\end{displaymath}
```

$1\frac{1}{2}$ hours

$$\frac{x^2}{k+1} \quad x^{\frac{2}{k+1}} \quad x^{1/2}$$

To typeset binomial coefficients or similar structures, you can use either the command `\binom{num}{denom}` or `\genfrac{ldelim}{rdelim}{thickness}{style}{num}{denom}`. The second command can be used to produce customized fraction like output and more information can be found in Mittelbach *et al.* [1].

```
\begin{displaymath}
\binom{n}{k} \quad \quad
\genfrac{}{}{0pt}{}{x}{y+2}
\end{displaymath}
```

$$\binom{n}{k} \quad \frac{x}{y+2}$$

The **integral operator** is generated with `\int`, the **sum operator** with `\sum`. The upper and lower limits are specified with `^` and `_` like subscripts and superscripts.

```
\begin{displaymath}
\sum_{i=1}^n \quad \quad
\int_0^{\pi/2}
\end{displaymath}
```

$$\sum_{i=1}^n \quad \int_0^{\pi/2}$$

For **braces** and other delimiters, there exist all types of symbols in $\text{T}_\text{E}\text{X}$ (e.g. $[\langle \parallel \Downarrow$). Round and square braces can be entered with the corresponding keys, curly braces with `\{`, all other delimiters are generated with special commands (e.g. `\updownarrow`). For a list of all delimiters available, check Kopka & Daly [2].

```
\begin{displaymath}
\{a,b,c\}\neq\{a,b,c\}
\end{displaymath}
```

$$a,b,c \neq \{a,b,c\}$$

If you put the command `\left` in front of an opening delimiter or `\right` in front of a closing delimiter, $\text{T}_\text{E}\text{X}$ will automatically determine the correct size of the delimiter. Note that you must close every `\left` with a corresponding `\right`, and that the size is determined correctly only if both are typeset on the same line. If you don't want anything on the right, use the invisible `\right .`!

```
\begin{displaymath}
1 + \left( \frac{1}{1-x^2} \right)^3
\end{displaymath}
```

$$1 + \left(\frac{1}{1-x^2} \right)^3$$

In some cases it is necessary to specify the correct size of a mathematical delimiter by hand, which can be done using the commands `\big`, `\Big`, `\bigg` and `\Bigg` as prefixes to most delimiter commands.³

```
$$\Big( (x+1)(x-1) \Big)^2$\\
$\big(\Big(\bigg(\Bigg(\quad
$\big)\Big)\bigg)\Bigg)\quad
$\big\|\Big\|\bigg\|\Bigg\|$$
```

$$\left((x+1)(x-1) \right)^2 \\ \left(\left(\left(\left(\right) \right) \right) \right) \parallel \parallel \parallel \parallel$$

To enter **three dots** into a formula, you can use several commands. `\ldots` typesets the dots on the baseline, `\cdots` sets them centered. Besides that, there are the commands `\vdots` for vertical and `\ddots` for diagonal dots. You can find another example in section A.5.

```
\begin{displaymath}
x_{\{1\}}, \ldots, x_{\{n\}} \quad \text{qquad} \\
x_{\{1\}} + \cdots + x_{\{n\}}
\end{displaymath}
```

$$x_1, \dots, x_n \quad x_1 + \cdots + x_n$$

³These commands do not work as expected if a size changing command has been used, or the 11pt or 12pt option has been specified. Use the `exscale` or `amsmath` packages to correct this behaviour.

A.4 MATH SPACING

If the spaces within formulae chosen by T_EX are not satisfactory, they can be adjusted by inserting special spacing commands. There are some commands for small spaces: `\,` for $\frac{3}{18}$ quad ($\mathbb{U}$), `\:` for $\frac{4}{18}$ quad ($\mathbb{U}$) and `\;` for $\frac{5}{18}$ quad ($\mathbb{U}$). The escaped space character `\_` generates a medium sized space and `\quad` ($\mathbb{U}$) and `\qquad` ($\mathbb{U}$) produce large spaces. The size of a quad corresponds to the width of the character ‘M’ of the current font. The `\!` command produces a negative space of $-\frac{3}{18}$ quad ($\mathbb{U}$).

```
\newcommand{\rd}{\mathrm{d}}
\begin{displaymath}
\int\!\!\!\!\!\int\limits_D g(x,y)
\quad \backslash, \quad \backslash rd x \backslash, \quad \backslash rd y
\end{displaymath}
instead of
\begin{displaymath}
\int\limits_D g(x,y)\backslash rd x \backslash rd y
\end{displaymath}
```

$$\iint_D g(x,y) \, dx \, dy$$

instead of

$$\int \int_D g(x,y) dx dy$$

Note that ‘d’ in the differential is conventionally set in roman.

$\mathcal{A}\mathcal{M}\mathcal{S}\text{-}\mathcal{L}\mathcal{T}\mathcal{E}\mathcal{X}$ provides another way for fine tuning the spacing between multiple integral signs, namely the `\iint`, `\iiint`, `\iiiint`, and `\idotsint` commands. With the `amsmath` package loaded, the above example can be typeset this way:

```
\newcommand{\rd}{\mathrm{d}}
\begin{displaymath}
\iint\limits_D \backslash, \quad \backslash rd x \backslash, \quad \backslash rd y
\end{displaymath}
```

$$\iint_D dx \, dy$$

See the electronic document `testmath.tex` (distributed with $\mathcal{A}\mathcal{M}\mathcal{S}\text{-}\mathcal{L}\mathcal{T}\mathcal{E}\mathcal{X}$) or Chapter 8 of “The LaTeX Companion”⁴ for further details.

A.5 VERTICALLY ALIGNED MATERIAL

To typeset **arrays**, use the `array` environment. It works somewhat similar to the `tabular` environment. The `\\` command is used to break the lines.

⁴available at CTAN:/tex-archive/info/ch8.*.

```
\begin{displaymath}
\mathbf{X} =
\left( \begin{array}{ccc}
x_{11} & x_{12} & \ldots \\
x_{21} & x_{22} & \ldots \\
\vdots & \vdots & \ddots
\end{array} \right)
\end{displaymath}
```

$$\mathbf{X} = \begin{pmatrix} x_{11} & x_{12} & \dots \\ x_{21} & x_{22} & \dots \\ \vdots & \vdots & \ddots \end{pmatrix}$$

The array environment can also be used to typeset expressions which have one big delimiter by using a “.” as an invisible right delimiter:

```
\begin{displaymath}
y = \left\{ \begin{array}{ll}
a & \text{if } d > c \\
b+x & \text{in the morning} \\
l & \text{all day long}
\end{array} \right.
\end{displaymath}
```

$$y = \begin{cases} a & \text{if } d > c \\ b+x & \text{in the morning} \\ l & \text{all day long} \end{cases}$$

For formulae running over several lines or for equation systems, you can use the environments `eqnarray`, and `eqnarray*` instead of `equation`. In `eqnarray` each line gets an equation number. The `eqnarray*` does not number anything.

The `eqnarray` and the `eqnarray*` environments work like a 3-column table of the form `{rc1}`, where the middle column can be used for the equal sign or the not-equal sign. Or any other sign you see fit. The `\\` command breaks the lines.

```
\begin{eqnarray}
f(x) & = & \cos x & \\
f'(x) & = & -\sin x & \\
\int_0^x f(y)dy & = & \sin x & \\
\end{eqnarray}
```

$$\begin{array}{rcl} f(x) & = & \cos x \quad (A.5) \\ f'(x) & = & -\sin x \quad (A.6) \\ \int_0^x f(y)dy & = & \sin x \quad (A.7) \end{array}$$

Notice that the space on either side of the the equal signs is rather large. It can be reduced by setting `\setlength\arraycolsep{2pt}`, as in the next example.

Long equations will not be automatically divided into neat bits. The author has to specify where to break them and how much to indent. The following two methods are the most common ones used to achieve this.


```

\begin{displaymath}
\mathop{\mathrm{corr}}(X,Y)=
\frac{\displaystyle
\sum_{i=1}^n(x_i-\overline{x})
(y_i-\overline{y})}
{\displaystyle\biggl[
\sum_{i=1}^n(x_i-\overline{x})^2
\sum_{i=1}^n(y_i-\overline{y})^2
\biggr]^{1/2}}
\end{displaymath}

```

$$\mathrm{corr}(X,Y) = \frac{\sum_{i=1}^n (x_i - \bar{x})(y_i - \bar{y})}{\left[\sum_{i=1}^n (x_i - \bar{x})^2 \sum_{i=1}^n (y_i - \bar{y})^2 \right]^{1/2}}$$

This is one of those examples in which we need larger brackets than the standard `\left[ \right]` provides.

A.7 THEOREMS, LAWS, ...

When writing mathematical documents, you probably need a way to typeset “Lemmas”, “Definitions”, “Axioms” and similar structures. L^AT_EX supports this with the command

```
newtheorem{name}[counter]{text}[section]
```

The *name* argument, is a short keyword used to identify the “theorem”. With the *text* argument, you define the actual name of the “theorem” which will be printed in the final document.

The arguments in square brackets are optional. They are both used to specify the numbering used on the “theorem”. With the *counter* argument you can specify the *name* of a previously declared “theorem”. The new “theorem” will then be numbered in the same sequence. The *section* argument allows you to specify the sectional unit within which you want your “theorem” to be numbered.

After executing the `newtheorem` command in the preamble of your document, you can use the following command within the document.

```

\begin{name}[text]
This is my interesting theorem
\end{name}

```

This should be enough theory. The following examples will hopefully remove the final remains of doubt and make it clear that the `\newtheorem` environment is way too complex to understand.

```
% definitions for the document
% preamble
\newtheorem{law}{Law}
\newtheorem{jury}[law]{Jury}
%in the document
\begin{law} \label{law:box}
Don't hide in the witness box
\end{law}
\begin{jury}[The Twelve]
It could be you! So beware and
see law~\ref{law:box}\end{jury}
\begin{law}No, No, No\end{law}
```

Law 1. *Don't hide in the witness box*

Jury 2 (The Twelve). *It could be you! So beware and see law 1*

Law 3. *No, No, No*

The “Jury” theorem uses the same counter as the “Law” theorem. Therefore it gets a number which is in sequence with the other “Laws”. The argument in square brackets is used to specify a title or something similar for the theorem.

```
\flushleft
\newtheorem{mur}{Murphy}[section]
\begin{mur}
If there are two or more
ways to do something, and
one of those ways can result
in a catastrophe, then
someone will do it.\end{mur}
```

Murphy A.7.1. *If there are two or more ways to do something, and one of those ways can result in a catastrophe, then someone will do it.*

The “Murphy” theorem gets a number which is linked to the number of the current section. You could also use another unit, for example chapter or subsection.

A.8 BOLD SYMBOLS

It is quite difficult to get bold symbols in L^AT_EX; this is probably intentional as amateur typesetters tend to overuse them. The font change command `\mathbf` gives bold letters, but these are roman (upright) whereas mathematical symbols are normally italic. There is a `\boldmath` command, but *this can only be used outside mathematics mode*. It works for symbols too.

```
\begin{displaymath}\label{boldmath}
\mu, M \quad \mathbf{M} \quad
\mbox{\boldmath $\mu, M$}
\end{displaymath}
```

μ, M **M** μ, M

Notice that the comma is bold too, which may not be what is required.

The package `amssbsy` (included by `amsmath`) makes this much easier as it includes a `\boldsymbol` command.

```
\begin{displaymath}\label{boldsymbol}
\mu, M \quad \quad
\boldsymbol{\mu}, \boldsymbol{M}
\end{displaymath}
```

$$\mu, M \quad \mu, M$$

A.9 LIST OF MATHEMATICAL SYMBOLS

In the following tables, you find all the symbols normally accessible from *math mode*.

To use the symbols listed in Tables A.12–A.17,⁶ the package `amssymb` must be loaded in the preamble of the document and the AMS math fonts must be installed, on the system. If the AMS package and fonts are not installed, on your system, have a look at

CTAN:/tex-archive/macros/latex/required/amslatex

Table A.1: Math Mode Accents.

$\hat{a}$	<code>\hat{a}</code>	$\check{a}$	<code>\check{a}</code>	$\tilde{a}$	<code>\tilde{a}</code>	$\acute{a}$	<code>\acute{a}</code>
$\grave{a}$	<code>\grave{a}</code>	$\dot{a}$	<code>\dot{a}</code>	$\ddot{a}$	<code>\ddot{a}</code>	$\breve{a}$	<code>\breve{a}</code>
$\bar{a}$	<code>\bar{a}</code>	$\vec{a}$	<code>\vec{a}</code>	$\widehat{A}$	<code>\widehat{A}</code>	$\widetilde{A}$	<code>\widetilde{A}</code>

Table A.2: Lowercase Greek Letters.

α	<code>\alpha</code>	θ	<code>\theta</code>	o	<code>o</code>	υ	<code>\upsilon</code>
β	<code>\beta</code>	ϑ	<code>\vartheta</code>	π	<code>\pi</code>	ϕ	<code>\phi</code>
γ	<code>\gamma</code>	ι	<code>\iota</code>	ϖ	<code>\varpi</code>	φ	<code>\varphi</code>
δ	<code>\delta</code>	κ	<code>\kappa</code>	ρ	<code>\rho</code>	χ	<code>\chi</code>
ϵ	<code>\epsilon</code>	λ	<code>\lambda</code>	ϱ	<code>\varrho</code>	ψ	<code>\psi</code>
ε	<code>\varepsilon</code>	μ	<code>\mu</code>	σ	<code>\sigma</code>	ω	<code>\omega</code>
ζ	<code>\zeta</code>	ν	<code>\nu</code>	ς	<code>\varsigma</code>		
η	<code>\eta</code>	ξ	<code>\xi</code>	τ	<code>\tau</code>		

Table A.3: Uppercase Greek Letters.

Γ	<code>\Gamma</code>	Λ	<code>\Lambda</code>	Σ	<code>\Sigma</code>	Ψ	<code>\Psi</code>
Δ	<code>\Delta</code>	Ξ	<code>\Xi</code>	Υ	<code>\Upsilon</code>	Ω	<code>\Omega</code>
Θ	<code>\Theta</code>	Π	<code>\Pi</code>	Φ	<code>\Phi</code>		

⁶These tables were derived from `symbols.tex` by David Carlisle and subsequently changed extensively as suggested by Josef Tkadlec.

Table A.4: Binary Relations.

You can produce corresponding negations by adding a `\not` command as prefix to the following symbols.

$<$	<code><</code>	$>$	<code>></code>	$=$	<code>=</code>
$\leq$	<code>\leq</code> or <code>\le</code>	$\geq$	<code>\geq</code> or <code>\ge</code>	$\equiv$	<code>\equiv</code>
$\ll$	<code>\ll</code>	$\gg$	<code>\gg</code>	$\dot{=}$	<code>\doteq</code>
$\prec$	<code>\prec</code>	$\succ$	<code>\succ</code>	$\sim$	<code>\sim</code>
$\preceq$	<code>\preceq</code>	$\succeq$	<code>\succeq</code>	$\simeq$	<code>\simeq</code>
$\subset$	<code>\subset</code>	$\supset$	<code>\supset</code>	$\approx$	<code>\approx</code>
$\subseteq$	<code>\subseteq</code>	$\supseteq$	<code>\supseteq</code>	$\cong$	<code>\cong</code>
$\sqsubset$	<code>\sqsubset</code> ^a	$\sqsupset$	<code>\sqsupset</code> ^a	$\bowtie$	<code>\Join</code> ^a
$\sqsubseteq$	<code>\sqsubseteq</code>	$\sqsupseteq$	<code>\sqsupseteq</code>	$\bowtie$	<code>\bowtie</code>
$\in$	<code>\in</code>	$\ni$	<code>\ni</code> , <code>\owns</code>	$\propto$	<code>\propto</code>
$\vdash$	<code>\vdash</code>	$\dashv$	<code>\dashv</code>	$\models$	<code>\models</code>
$\mid$	<code>\mid</code>	$\parallel$	<code>\parallel</code>	$\perp$	<code>\perp</code>
$\smile$	<code>\smile</code>	$\frown$	<code>\frown</code>	$\asymp$	<code>\asymp</code>
$:$	<code>:</code>	$\notin$	<code>\notin</code>	$\neq$	<code>\neq</code> or <code>\ne</code>

^aUse the `latexsym` package to access this symbol

Table A.5: Binary Operators.

$+$	<code>+</code>	$-$	<code>-</code>		
$\pm$	<code>\pm</code>	$\mp$	<code>\mp</code>	$\triangleleft$	<code>\triangleleft</code>
$\cdot$	<code>\cdot</code>	$\div$	<code>\div</code>	$\triangleright$	<code>\triangleright</code>
$\times$	<code>\times</code>	$\setminus$	<code>\setminus</code>	$\star$	<code>\star</code>
$\cup$	<code>\cup</code>	$\cap$	<code>\cap</code>	$*$	<code>\ast</code>
$\sqcup$	<code>\sqcup</code>	$\sqcap$	<code>\sqcap</code>	$\circ$	<code>\circ</code>
$\vee$	<code>\vee</code> , <code>\lor</code>	$\wedge$	<code>\wedge</code> , <code>\land</code>	$\bullet$	<code>\bullet</code>
$\oplus$	<code>\oplus</code>	$\ominus$	<code>\ominus</code>	$\diamond$	<code>\diamond</code>
$\odot$	<code>\odot</code>	$\oslash$	<code>\oslash</code>	$\uplus$	<code>\uplus</code>
$\otimes$	<code>\otimes</code>	$\bigcirc$	<code>\bigcirc</code>	$\amalg$	<code>\amalg</code>
$\triangleup$	<code>\triangleup</code>	$\triangledown$	<code>\triangledown</code>	$\dagger$	<code>\dagger</code>
$\lhd$	<code>\lhd</code> ^a	$\rhd$	<code>\rhd</code> ^a	$\ddagger$	<code>\ddagger</code>
$\unlhd$	<code>\unlhd</code> ^a	$\unrhd$	<code>\unrhd</code> ^a	$\wr$	<code>\wr</code>

Table A.6: BIG Operators.

$\sum$	<code>\sum</code>	$\bigcup$	<code>\bigcup</code>	$\bigvee$	<code>\bigvee</code>	$\bigoplus$	<code>\bigoplus</code>
$\prod$	<code>\prod</code>	$\bigcap$	<code>\bigcap</code>	$\bigwedge$	<code>\bigwedge</code>	$\bigotimes$	<code>\bigotimes</code>
$\coprod$	<code>\coprod</code>	$\bigsqcup$	<code>\bigsqcup</code>			$\bigodot$	<code>\bigodot</code>
$\int$	<code>\int</code>	$\oint$	<code>\oint</code>			$\biguplus$	<code>\biguplus</code>

Table A.7: Arrows.

$\leftarrow$	<code>\leftarrow</code> or <code>\gets</code>	$\longleftarrow$	<code>\longleftarrow</code>	$\uparrow$	<code>\uparrow</code>
$\rightarrow$	<code>\rightarrow</code> or <code>\to</code>	$\longrightarrow$	<code>\longrightarrow</code>	$\downarrow$	<code>\downarrow</code>
$\leftrightarrow$	<code>\leftrightarrow</code>	$\longleftrightarrow$	<code>\longleftrightarrow</code>	$\updownarrow$	<code>\updownarrow</code>
$\Leftarrow$	<code>\Leftarrow</code>	$\Longleftarrow$	<code>\Longleftarrow</code>	$\Uparrow$	<code>\Uparrow</code>
$\Rightarrow$	<code>\Rightarrow</code>	$\Longrightarrow$	<code>\Longrightarrow</code>	$\Downarrow$	<code>\Downarrow</code>
$\Leftrightarrow$	<code>\Leftrightarrow</code>	$\Longleftrightarrow$	<code>\Longleftrightarrow</code>	$\Updownarrow$	<code>\Updownarrow</code>
$\mapsto$	<code>\mapsto</code>	$\longmapsto$	<code>\longmapsto</code>	$\nearrow$	<code>\nearrow</code>
$\hookrightarrow$	<code>\hookrightarrow</code>	$\hookrightarrow$	<code>\hookrightarrow</code>	$\searrow$	<code>\searrow</code>
$\leftharpoonup$	<code>\leftharpoonup</code>	$\rightharpoonup$	<code>\rightharpoonup</code>	$\swarrow$	<code>\swarrow</code>
$\leftharpoondown$	<code>\leftharpoondown</code>	$\rightharpoondown$	<code>\rightharpoondown</code>	$\nwarrow$	<code>\nwarrow</code>
$\rightleftharpoons$	<code>\rightleftharpoons</code>	$\iff$ (bigger spaces)	<code>\iff</code> (bigger spaces)	$\leadsto$	<code>\leadsto</code> ^a

^aUse the `latexsym` package to access this symbol

Table A.8: Delimiters.

$($	<code>(</code>	$)$	<code>)</code>	$\uparrow$	<code>\uparrow</code>	$\Uparrow$	<code>\Uparrow</code>
$[$	<code>[</code> or <code>\lbrack</code>	$]$	<code>] or \rbrack</code>	$\downarrow$	<code>\downarrow</code>	$\Downarrow$	<code>\Downarrow</code>
$\{$	<code>\{</code> or <code>\lbrace</code>	$\}$	<code>\} or \rbrace</code>	$\updownarrow$	<code>\updownarrow</code>	$\Updownarrow$	<code>\Updownarrow</code>
$\langle$	<code>\langle</code>	$\rangle$	<code>\rangle</code>	$ $	<code> or \vert</code>	$\ $	<code>\ or \Vert</code>
$\lfloor$	<code>\lfloor</code>	$\rfloor$	<code>\rfloor</code>	$\lceil$	<code>\lceil</code>	$\rceil$	<code>\rceil</code>
$/$	<code>/</code>	$\backslash$	<code>\backslash</code>	. (dual. empty)			

Table A.9: Large Delimiters.

$\left($	<code>\lgroup</code>	$\right)$	<code>\rgroup</code>	$\left[$	<code>\lmoustache</code>	$\right]$	<code>\rmoustache</code>
$\uparrow$	<code>\arrowvert</code>	$\Uparrow$	<code>\Arrowvert</code>	$\lceil$	<code>\bracevert</code>	$\rceil$	

Table A.10: Miscellaneous Symbols.

$\dots$	<code>\dots</code>	$\cdots$	<code>\cdots</code>	$\vdots$	<code>\vdots</code>	$\ddots$	<code>\ddots</code>
$\hbar$	<code>\hbar</code>	$\imath$	<code>\imath</code>	$\jmath$	<code>\jmath</code>	ℓ	<code>\ell</code>
$\Re$	<code>\Re</code>	$\Im$	<code>\Im</code>	$\aleph$	<code>\aleph</code>	$\wp$	<code>\wp</code>
$\forall$	<code>\forall</code>	$\exists$	<code>\exists</code>	$\mho$	<code>\mho</code> ^a	∂	<code>\partial</code>
$'$	<code>'</code>	$\prime$	<code>\prime</code>	$\emptyset$	<code>\emptyset</code>	∞	<code>\infty</code>
∇	<code>\nabla</code>	$\triangle$	<code>\triangle</code>	$\Box$	<code>\Box</code> ^a	$\diamond$	<code>\Diamond</code> ^a
$\bot$	<code>\bot</code>	$\top$	<code>\top</code>	$\angle$	<code>\angle</code>	$\surd$	<code>\surd</code>
$\diamondsuit$	<code>\diamondsuit</code>	$\heartsuit$	<code>\heartsuit</code>	$\clubsuit$	<code>\clubsuit</code>	$\spadesuit$	<code>\spadesuit</code>
$\neg$	<code>\neg</code> or <code>\not</code>	$\flat$	<code>\flat</code>	$\natural$	<code>\natural</code>	$\sharp$	<code>\sharp</code>

^aUse the `latexsym` package to access this symbol

Table A.11: Non-Mathematical Symbols.

These symbols can also be used in text mode.

†	<code>\dag</code>	§	<code>\S</code>	©	<code>\copyright</code>
‡	<code>\ddag</code>	¶	<code>\P</code>	£	<code>\pounds</code>

Table A.12: AMS Delimiters.

⌈	<code>\ulcorner</code>	⌋	<code>\urcorner</code>	⌌	<code>\llcorner</code>	⌍	<code>\lrcorner</code>
---	------------------------	---	------------------------	---	------------------------	---	------------------------

Table A.13: AMS Greek and Hebrew.

ƒ	<code>\digamma</code>	κ	<code>\varkappa</code>	Ɑ	<code>\beth</code>	ד	<code>\daleth</code>	ג	<code>\gimel</code>
---	-----------------------	---	------------------------	---	--------------------	---	----------------------	---	---------------------

Table A.14: AMS Binary Relations.

$\lessdot$	<code>\lessdot</code>	$\gtrdot$	<code>\gtrdot</code>	$\doteqdot$ or $\Doteq$	<code>\doteqdot</code> or <code>\Doteq</code>
$\leqslant$	<code>\leqslant</code>	$\geqslant$	<code>\geqslant</code>	$\risingdotseq$	<code>\risingdotseq</code>
$\eqslantless$	<code>\eqslantless</code>	$\eqslantgtr$	<code>\eqslantgtr</code>	$\fallingdotseq$	<code>\fallingdotseq</code>
$\leqq$	<code>\leqq</code>	$\geqq$	<code>\geqq</code>	$\eqcirc$	<code>\eqcirc</code>
$\lll$ or $\llless$	<code>\lll</code> or <code>\llless</code>	$\ggg$ or $\gggtr$	<code>\ggg</code> or <code>\gggtr</code>	$\circeq$	<code>\circeq</code>
$\lesssim$	<code>\lesssim</code>	$\gtrsim$	<code>\gtrsim</code>	$\triangleq$	<code>\triangleq</code>
$\lessapprox$	<code>\lessapprox</code>	$\gtrapprox$	<code>\gtrapprox</code>	$\bumpeq$	<code>\bumpeq</code>
$\lessgtr$	<code>\lessgtr</code>	$\gtrless$	<code>\gtrless</code>	$\Bumpeq$	<code>\Bumpeq</code>
$\lesseqgtr$	<code>\lesseqgtr</code>	$\gtreqless$	<code>\gtreqless</code>	$\thicksim$	<code>\thicksim</code>
$\lesseqqgtr$	<code>\lesseqqgtr</code>	$\gtreqqless$	<code>\gtreqqless</code>	$\thickapprox$	<code>\thickapprox</code>
$\preccurlyeq$	<code>\preccurlyeq</code>	$\succcurlyeq$	<code>\succcurlyeq</code>	$\approxeq$	<code>\approxeq</code>

Table A.15: AMS Binary Relations Continued.

$\curlyeqprec$	<code>\curlyeqprec</code>	$\curlyeqsucc$	<code>\curlyeqsucc</code>	$\backsim$	<code>\backsim</code>
$\precsim$	<code>\precsim</code>	$\succsim$	<code>\succsim</code>	$\backsimeq$	<code>\backsimeq</code>
$\precapprox$	<code>\precapprox</code>	$\succapprox$	<code>\succapprox</code>	$\vDash$	<code>\vDash</code>
$\subseteq$	<code>\subseteq</code>	$\supseteq$	<code>\supseteq</code>	$\Vdash$	<code>\Vdash</code>
$\Subset$	<code>\Subset</code>	$\Supset$	<code>\Supset</code>	$\Vvdash$	<code>\Vvdash</code>
$\sqsubset$	<code>\sqsubset</code>	$\sqsupset$	<code>\sqsupset</code>	$\backepsilon$	<code>\backepsilon</code>
$\therefore$	<code>\therefore</code>	$\because$	<code>\because</code>	$\varpropto$	<code>\varpropto</code>
$\shortmid$	<code>\shortmid</code>	$\shortparallel$	<code>\shortparallel</code>	$\between$	<code>\between</code>
$\smallsmile$	<code>\smallsmile</code>	$\smallfrown$	<code>\smallfrown</code>	$\pitchfork$	<code>\pitchfork</code>
$\vartriangleleft$	<code>\vartriangleleft</code>	$\vartriangleright$	<code>\vartriangleright</code>	$\blacktriangleleft$	<code>\blacktriangleleft</code>
$\trianglelefteq$	<code>\trianglelefteq</code>	$\trianglerighteq$	<code>\trianglerighteq</code>	$\blacktriangleright$	<code>\blacktriangleright</code>

Table A.16: AMS Arrows.

$\dashleftarrow$	<code>\dashleftarrow</code>	$\dashrightarrow$	<code>\dashrightarrow</code>	$\multimap$	<code>\multimap</code>
$\Lleftarrow$	<code>\leftleftarrows</code>	$\Rrightarrow$	<code>\rightrightarrows</code>	$\Uparrow$	<code>\upuparrows</code>
$\Leftrightarrow$	<code>\leftrightharpoons</code>	$\Rrightarrow$	<code>\rightleftarrows</code>	$\Downarrow$	<code>\downdownarrows</code>
$\Lleftarrow$	<code>\Lleftarrow</code>	$\Rrightarrow$	<code>\Rrightarrow</code>	$\Uparrow$	<code>\upharpoonleft</code>
$\twoheadleftarrow$	<code>\twoheadleftarrow</code>	$\twoheadrightarrow$	<code>\twoheadrightarrow</code>	$\Uparrow$	<code>\upharpoonright</code>
$\leftarrowtail$	<code>\leftarrowtail</code>	$\rightarrowtail$	<code>\rightarrowtail</code>	$\Downarrow$	<code>\downharpoonleft</code>
$\leftrightharpoons$	<code>\leftrightharpoons</code>	$\rightleftharpoons$	<code>\rightleftharpoons</code>	$\Downarrow$	<code>\downharpoonright</code>
$\Lsh$	<code>\Lsh</code>	$\Rsh$	<code>\Rsh</code>	$\rightsquigarrow$	<code>\rightsquigarrow</code>
$\looparrowleft$	<code>\looparrowleft</code>	$\looparrowright$	<code>\looparrowright</code>	$\leftrightsquigarrow$	<code>\leftrightsquigarrow</code>
$\curvearrowleft$	<code>\curvearrowleft</code>	$\curvearrowright$	<code>\curvearrowright</code>		
$\circlearrowleft$	<code>\circlearrowleft</code>	$\circlearrowright$	<code>\circlearrowright</code>		

Table A.17: AMS Negated Binary Relations and Arrows.

$\nless$	<code>\nless</code>	$\ngtr$	<code>\ngtr</code>	$\varsubsetneqq$	<code>\varsubsetneqq</code>
$\lneq$	<code>\lneq</code>	$\gneq$	<code>\gneq</code>	$\varsupsetneqq$	<code>\varsupsetneqq</code>
$\nleq$	<code>\nleq</code>	$\ngeq$	<code>\ngeq</code>	$\nsubseteq$	<code>\nsubseteq</code>
$\nleqslant$	<code>\nleqslant</code>	$\ngeqslant$	<code>\ngeqslant</code>	$\nsupseteq$	<code>\nsupseteq</code>
$\lneqq$	<code>\lneqq</code>	$\gneqq$	<code>\gneqq</code>	$\nmid$	<code>\nmid</code>
$\lvertneqq$	<code>\lvertneqq</code>	$\gvertneqq$	<code>\gvertneqq</code>	$\nparallel$	<code>\nparallel</code>
$\nleqq$	<code>\nleqq</code>	$\ngeqq$	<code>\ngeqq</code>	$\nshortmid$	<code>\nshortmid</code>
$\lnsim$	<code>\lnsim</code>	$\gnsim$	<code>\gnsim</code>	$\nshortparallel$	<code>\nshortparallel</code>
$\lnapprox$	<code>\lnapprox</code>	$\gnapprox$	<code>\gnapprox</code>	$\nsim$	<code>\nsim</code>
$\nprec$	<code>\nprec</code>	$\nsucc$	<code>\nsucc</code>	$\ncong$	<code>\ncong</code>
$\npreceq$	<code>\npreceq</code>	$\nsucceq$	<code>\nsucceq</code>	$\nvdash$	<code>\nvdash</code>
$\precneqq$	<code>\precneqq</code>	$\succneqq$	<code>\succneqq</code>	$\nvDash$	<code>\nvDash</code>
$\precnsim$	<code>\precnsim</code>	$\succnsim$	<code>\succnsim</code>	$\nVdash$	<code>\nVdash</code>
$\precnapprox$	<code>\precnapprox</code>	$\succnapprox$	<code>\succnapprox</code>	$\nVDash$	<code>\nVDash</code>
$\subsetneq$	<code>\subsetneq</code>	$\supsetneq$	<code>\supsetneq</code>	$\ntriangleleft$	<code>\ntriangleleft</code>
$\varsubsetneq$	<code>\varsubsetneq</code>	$\varsupsetneq$	<code>\varsupsetneq</code>	$\ntriangleright$	<code>\ntriangleright</code>
$\nsubseteq$	<code>\nsubseteq</code>	$\nsupseteq$	<code>\nsupseteq</code>	$\ntrianglelefteq$	<code>\ntrianglelefteq</code>
$\subsetneqq$	<code>\subsetneqq</code>	$\supsetneqq$	<code>\supsetneqq</code>	$\ntrianglerighteq$	<code>\ntrianglerighteq</code>
$\nleftarrow$	<code>\nleftarrow</code>	$\nrightarrow$	<code>\nrightarrow</code>	$\nleftrightarrow$	<code>\nleftrightarrow</code>
$\nLeftarrow$	<code>\nLeftarrow</code>	$\nRightarrow$	<code>\nRightarrow</code>	$\nLeftrightarrow$	<code>\nLeftrightarrow</code>

Table A.18: AMS Binary Operators.

$\dotplus$	<code>\dotplus</code>	$\centerdot$	<code>\centerdot</code>	$\intercal$	<code>\intercal</code>
$\ltimes$	<code>\ltimes</code>	$\rtimes$	<code>\rtimes</code>	$\divideontimes$	<code>\divideontimes</code>
$\Cup$ or $\doublecup$	<code>\Cup</code> or <code>\doublecup</code>	$\Cap$ or $\doublecap$	<code>\Cap</code> or <code>\doublecap</code>	$\smallsetminus$	<code>\smallsetminus</code>
$\veebar$	<code>\veebar</code>	$\barwedge$	<code>\barwedge</code>	$\doublebarwedge$	<code>\doublebarwedge</code>
$\boxplus$	<code>\boxplus</code>	$\boxminus$	<code>\boxminus</code>	$\circleddash$	<code>\circleddash</code>
$\boxtimes$	<code>\boxtimes</code>	$\boxdot$	<code>\boxdot</code>	$\circledcirc$	<code>\circledcirc</code>
$\leftthreetimes$	<code>\leftthreetimes</code>	$\rightthreetimes$	<code>\rightthreetimes</code>	$\circledast$	<code>\circledast</code>
$\curlyvee$	<code>\curlyvee</code>	$\curlywedge$	<code>\curlywedge</code>		

Table A.19: AMS Miscellaneous.

$\hbar$	<code>\hbar</code>	$\hslash$	<code>\hslash</code>	$\mathbb{k}$	<code>\Bbbk</code>
$\square$	<code>\square</code>	$\blacksquare$	<code>\blacksquare</code>	$\textcircled{S}$	<code>\circledS</code>
$\triangle$	<code>\vartriangle</code>	$\blacktriangle$	<code>\blacktriangle</code>	$\complement$	<code>\complement</code>
∇	<code>\triangledown</code>	$\blacktriangledown$	<code>\blacktriangledown</code>	$\Game$	<code>\Game</code>
$\lozenge$	<code>\lozenge</code>	$\blacklozenge$	<code>\blacklozenge</code>	$\bigstar$	<code>\bigstar</code>
$\angle$	<code>\angle</code>	$\measuredangle$	<code>\measuredangle</code>	$\sphericalangle$	<code>\sphericalangle</code>
$\diagup$	<code>\diagup</code>	$\diagdown$	<code>\diagdown</code>	$\backprime$	<code>\backprime</code>
$\nexists$	<code>\nexists</code>	$\Finv$	<code>\Finv</code>	$\varnothing$	<code>\varnothing</code>
$\eth$	<code>\eth</code>	$\mho$	<code>\mho</code>		

Table A.20: Math Alphabets.

Example	Command	Required package
ABCdef	<code>\mathrm{ABCdef}</code>	
ABCdef	<code>\mathit{ABCdef}</code>	
$\mathnormal{ABCdef}$	<code>\mathnormal{ABCdef}</code>	
$\mathcal{ABC}$	<code>\mathcal{ABC}</code>	
$\mathcal{ABC}$	<code>\mathcal{ABC}</code>	eucal with option: or
	<code>\mathscr{ABC}</code>	eucal with option: mathscr
$\mathfrak{ABCdef}$	<code>\mathfrak{ABCdef}</code>	eufrak
$\mathbf{ABC}$	<code>\mathbf{ABC}</code>	amsfonts or amssymb

APPENDIX B

EXAMPLES OF JAVA CODE

Here are some examples of Java source using the listings package. I have entered the following before any code examples to format the code as shown.

```
\lstset{language=java}
\lstset{backgroundcolor=\color{white},rulecolor=\color{black}}
\lstset{linewidth=.95\textwidth,breaklines=true}
\lstset{commentstyle=\textit,stringstyle=\upshape,showspaces=false}
\lstset{frame = trbl, frameround=tttt}
\lstset{numbers=left,numberstyle=\tiny,basicstyle=\small}
\lstset{commentstyle=\normalfont\itshape,breakautoindent=true}
\lstset{abovcaptionskip=1.2\baselineskip,xleftmargin=30pt}
\lstset{framesep=6pt}
```

I have included the code by entering

```
\begin{singlespace}
\lstinputlisting[caption=Clock Code,label=clock]{source/Clock.java}
\end{singlespace}
```

```
1 //file: Clock.java
2 public class Clock extends UpdateApplet {
3     public void paint( java.awt.Graphics g ) {
4         g.drawString( new java.util.Date().toString( ), 10, 25 );
5     }
6 }
```

Listing B.1: Clock Code

```
1 //file : Consumer.java
2 import java.util.Vector;
3
4 public class Consumer implements Runnable
5 {
6     Producer producer;
7
8     Consumer( Producer producer ) {
9         this.producer = producer;
10    }
11
12    public void run() {
13        while ( true ) {
14            String message = producer.getMessage();
15            System.out.println("Got_message:_" + message);
16            try {
17                Thread.sleep( 2000 );
18            } catch ( InterruptedException e ) { }
19        }
20    }
21
22    public static void main(String args[]) {
23        Producer producer = new Producer();
24        new Thread( producer ).start();
25        Consumer consumer = new Consumer( producer );
26        new Thread( consumer ).start();
27    }
28 }
```

Listing B.2: Consumer

```
1 //file : EvilEmpire.java
2 import java.net.*;
3
4 public class EvilEmpire {
5     public static void main(String[] args) throws Exception{
6         try {
7             Socket s = new Socket("????.????.???.", 80);
8             System.out.println("Connected!");
9         }
10        catch (SecurityException e) {
11            System.out.println("SecurityException:_could_not_connect.");
12        }
13    }
14 }
```

Listing B.3: EvilEmpire Code

APPENDIX C

C++ EXAMPLES

This appendix demonstrates the listings package's ability to format C++ code.

```
1  #include "Motion.h"
2
3
4  Motion::Motion(int _steps) : TimeSeries(_steps) {}
5
6  Motion::Motion(Noise2 *_noise) : TimeSeries(_noise->GetSteps()) {
7      noise = _noise;
8  }
9
10 Motion::~~Motion() {
11     delete noise;
12 }
13
14 void Motion::SyncWithNoise() {
15     if (noise != NULL) {
16         this->Initialize();
17         double sum = 0;
18         int getsteps = this->GetSteps();
19         for (int i = 0; i < getsteps; i++) {
20             sum += noise->GetData(i);
21             this->SetData(i, sum);
22         }
23     } else {
24         fprintf(stderr, "%s\n", MOTION_NOISE_ERR);
25     }
26 }
```

Listing C.1: Motion Class

```
1  #include <unistd.h>
2  #include "Plotter.h"
3
4
5  void Plotter::MakePlot(char *filename) {
6      ofstream fout(FILE_PLOT);
7      fout << "set_data_style_linespoints" << endl
8          << "plot_\\" << filename << "\"\" << endl;
9      fout.close();
```

```

10
11     int pid, status;
12     pid = fork();
13     if (pid >= 0) {
14         if (pid == 0) {
15             execl(FILE_GNUPLOT, "gnuplot", "-persist", FILE_PLOT, NULL);
16             fprintf(stderr, "%s_\\"gnuplot\\\"", EXEC_ERR);
17             exit(0);
18         } else {
19             wait(status);
20         }
21     } else {
22         fprintf(stderr, "%s_\\"gnuplot\\\"", FORK_ERR);
23     }
24
25     /* pid = fork();
26     if (pid >= 0) {
27         if (pid == 0) {
28             execlp("rm", FILE_PLOT, NULL);
29             fprintf(stderr, "%s \\"rm\\\"", EXEC_ERR);
30             exit(0);
31         } else {
32             wait(status);
33         }
34     } else {
35         fprintf(stderr, "%s \\"rm\\\"", FORK_ERR);
36     }
37     */
38 }

```

Listing C.2: Plotter Class

```

1  #include "Simulation.h"
2
3
4  Simulation::Simulation(int _steps, double H) {
5      noise = new Noise2(_steps);
6      motion = new Motion(noise);
7  }
8
9  Simulation::~Simulation() {
10     delete noise;
11     delete motion;
12 }
13
14 void Simulation::Analyze() {
15     noiseplotter.MakePlot("noise");
16     motionplotter.MakePlot("motion");
17 }

```

Listing C.3: Simulation Class

APPENDIX D

COVER AND COPYRIGHT EXAMPLES

Here are images showing what the options `scottie`, `wblack`, and `woostercopyright` produce when used for typesetting an IS.

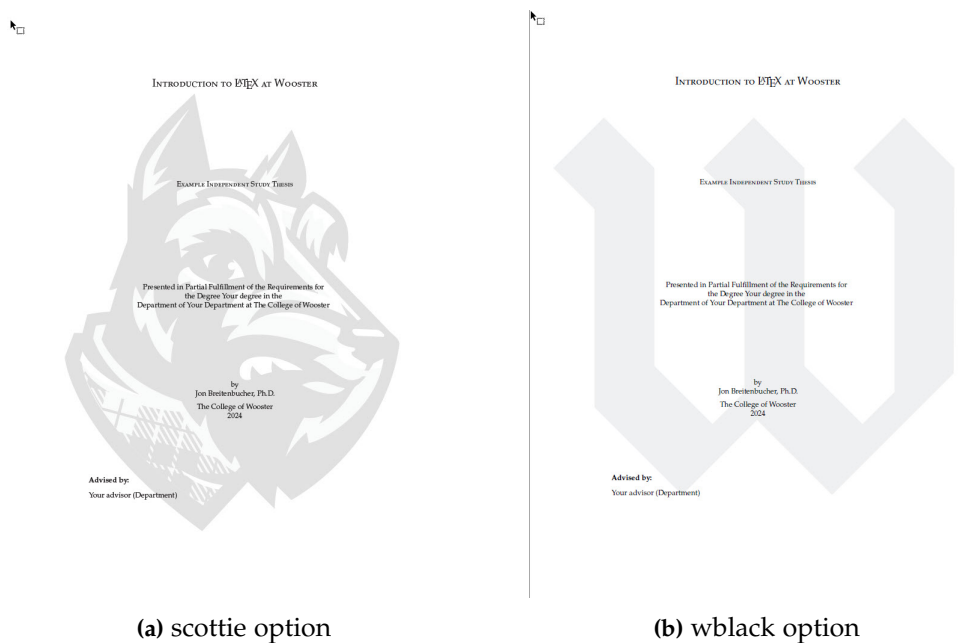


Figure D.1: Options for the IS Cover Page



Figure D.2: woostercopyright option

AFTERWORD

So how does a $\text{\LaTeX}$ session work? $\text{\LaTeX}$ loads the document class with any specified options and uses the information in the document class to decide on how the document will be formatted. At this point $\text{\LaTeX}$ loads any packages that the user has specified. Packages extend the basic $\text{\LaTeX}$ commands and formatting for special situations. `woosterthesis` loads several packages by default and several others through class options; it is assumed you have these installed on your system. They are: `alltt`, `amsmath`, `amssymb`, `amsthm`, `babel`, `biblatex`, `biblatex-chicago`, `caption`, `csquotes`, `eso-pic`, `eucal`, `eufarak`, `fancyhdr`, `float`, `floatflt`, `fontenc`, `fontspec`, `geometry`, `graphicx`, `hyperref`, `ifpdf`, `ifthen`, `ifxetex`, `inputenc`, `lettrine`, `listings`, `lmodern`, `makeidx`, `maple2e`, `microtype`, `pdftex`, `polyglossia`, `pxfonts`, `setspace`, `subfig`, `textpos`, `TikZ`, `verbatim`, `wrapfig`, `xcolor`, `xltextra`, and `xunicode`. The `woosterthesis` class assumes you are using $\text{pdf\TeX}$ (support for postscript based TeX has been dropped as of 2006/17/11).

The `hyperref` package will make your thesis a linked document. `amsthm` is for altering the Theorem environments. `amsmath` implements almost all the mathematical symbols. `amssymb` adds the mathematical symbols not present in `amsmath`. `graphicx` and `eso-pic` are used to place graphics files in the thesis. `geometry` is used to set up the margins for the thesis. `setspace` is used to alter spacing by allowing a `singlespace`, `doublespace`, and `onehalfspace` environments. `biblatex` formats citations and references. Documentation is included for some of the packages in the `doc` folder.

These packages should all be installed with a full installation of TeXLive on OS X or Windows. On OS X one can use the the MacTeX installer as i-Installer is no longer supported as of 2007/1/1. On Windows one can use MikTeX to install all available packages which will install all the above. By default the MikTeX install does a minimal installation. You will need to run the updater to make your MikTeX installation aware of all the new packages.

There is also a new TeX engine called XeTeX which allows one to use the native fonts on your system as text fonts in the document. More information can be found at the [XeTeX homepage](#). If using XeTeX you will also need `fontspec`, `xunicode`, and `xltextra` which should be installed with XeTeX. The default font

definitions for using XeTeX are in `styles/packages.tex` with suggestions for alternatives to the defaults that have been set.

Once the packages are loaded, L^AT_EX begins to process the commands contained between the document tags. As it processes the commands, several auxiliary files are created. These files contain information needed for things like the Bibliography, Table of Contents, List of Figures, etc. We then process the file a second time to allow L^AT_EX to use its auxiliary files to fill in information. Some information may require three passes before it is displayed. Once L^AT_EX is done you are presented with a PDF of the output.

REFERENCES

1. Mittelbach, F., Goossens, M., Braams, J., Carlisle, D. & Rowley, C. *The L^AT_EX Companion* 2nd (Addison Wesley Professional, New York, 2004) (pages xii, 4, 13, 17, 22).
2. Kopka, H. & Daly, P. W. *Guide to L^AT_EX* 4th (Pearson Education, New York, 2003) (pages xii, 13, 15, 17, 20–21, 23).
3. Oetiker, T., Partl, H., Hyna, I. & Schlegl, E. The Not So Short Introduction to L^AT_EX2e. <http://www.ctan.org/tex-archive/info/lshort/english/lshort.pdf> (2003) (pages xii, 18).
4. Feuerstack, T. Introduction to pdfT_EX. *TUGboat* 23(3/4), 329–334. <http://www.tug.org/TUGboat/Articles/tb23-3-4/tb75feu.pdf> (2002) (page xii).
5. Flynn, P. Formatting Information. *TUGboat* 23(2), 115–237. <http://www.tug.org/tex-archive/info/beginlatex/beginlatex.letter.pdf> (2003) (page xii).
6. Grätzer, G. *Math into L^AT_EX* <http://www.tug.org/tex-archive/info/mil/mil.pdf> (Birkhäuser, Boston, 1996) (page xii).
7. Breitenbucher, J. *Wooster related LaTeX files* World Wide Web. Accessed on 09/27/2021. 2021. <http://woolatex.spaces.wooster.edu>.
8. Konstantopoulos, S. *BibTeX Entries* World Wide Web. Accessed on 03/11/2004. 2004. <http://odur.let.rug.nl/~konstant/Ac/publications.html>.
9. Garcia, J. *Personal Identification Apparatus* tech. rep. (U.S. Patent and Trademark Office, 1986).
10. Singh, S. *The Code Book* (Anchor Books, New York, 1999).
11. Trappe, W. & Washington, L. C. *Introduction to Cryptography with Coding Theory* (Prentice Hall, Upper Saddle River, NJ, 2002).
12. Simmonds, F. *Network Security: Data and Voice Communications* (McGraw-Hill, 1996).

INDEX

Symbols

,	21
\,	19
\!	24
\(	18
\)	18
\,	24
\:	24
\;	24
\[	18
\]	18
^	20, 22
-	20, 22

A

amsmath	23, 26
array	24, 25
arrow symbols	21

B

blackboard bold	20
bold symbols	20, 28
braces	23

C

cases	6
commands	
Big	23
big	23
Bigg	23
bigg	23
binom	22
bmod	22
boldmath	28
boldsymbol	28
cdots	23
chapter	3
ddots	23
emph	4
frac	22
genfrac	22
idotsint	24
iiiint	24
iiint	24
iint	24
int	22
intertext	6

label	19
ldots	23
left	23
lstlisting	6, 7
mathbb	20
mathrm	26
notag	26
overbrace	21
overleftarrow	21
overline	21
overrightarrow	21
pmod	22
qquad	19, 24
quad	19, 24
ref	19
right	23
right	23, 25
section	3
sqrt	21
subsection	3
substack	5
sum	22
surd	21
textbf	4
textit	4
textrm	26
underbrace	21
underline	21
vdots	23
vec	21
widehat	21
widetilde	21

D

delimiters	23
diagonal dots	23
displaymath	18

E

eqnarray	25
equation	18
equation systems	25
exponent	20
exscale	23

F

formulae	18
fraction	22

G	
Greek letters	20
H	
horizontal	
brace	21
dots	23
line	21
I	
integral operator	22
L	
L ^A T _E X	xii
listings	
mathescape	7
lists	4
descriptive	4
enumerated	4
itemized	4
long equations	25
M	
math font size	26
math spacing	24
mathcal	34
mathematical	
accents	21
delimiter	23
functions	22
mathematics	18
mathscr	34
minipage	12
modulo function	22
P	
packages	
alltt	2, 41
ambsy	28
amsmath	20, 34, 41
amssymb	24, 28, 41
amsthm	20, 29, 34, 41
babel	4, 41
biblatex	2, 41
biblatex-chicago	41
caption	41
csquotes	2, 41
eso-pic	41
eucal	34, 41
eufrak	34, 41
fancyhdr	41
float	41
floatflt	41
fontenc	41
fontspec	41
geometry	41
graphicx	41

hyperref	41
ifpdf	41
ifthen	41
ifxetex	41
inputenc	41
lettrine	2, 41
listings	2, 6, 41
lmodern	41
makeidx	2, 41
maple2e	41
microtype	41
paralist	4
pdftex	41
polyglossia	2, 41
pxfonts	2, 41
setspace	2, 41
subfig	12, 41
textpos	41
TikZ	2, 10, 41
verbatim	41
woofncychap	2
wrapfig	2, 9, 41
xcolor	41
xltxtra	41
xunicode	41
prime	21
pseudocode	6

S

square root	21
subscript	20
sum operator	22

T

three dots	23
------------------	----

V

vectors	21
vertical dots	23

W

Wooster	17
User Services	17
Help Desk	17
woosterthesis options	
abstractonly	1
acs	1
alltt	1
apa	1
blacklinks	1
chicago	1
citeorder	1
code	1
colophon	1
dropcaps	1
euler	1
foreignlanguage	2
guass	2
index	2

kaukecopyright	2
maple	2
minimalstyle	2
mla	2
nostyle	2
palatino	2
picins	2, 9
scottie	2, 39
singlespace	2
tikz	2
verbatim	2
wblack	2, 39
woostercopyright	2, 39

